


## Specifications



### FEATURES

Netcom's 5674-W tunable filter covers the frequency range of 90MHz to 225MHz.

The filter is a single band tunable filter offering the advantage of small size with a control system comparable to larger size filters.



The following table shows the typical performance of the filter.

|                                     |                              |
|-------------------------------------|------------------------------|
| Frequency Range                     | 90MHz to 225MHz              |
| BW (Typical)                        | 9.5%                         |
| Impedance (Input /Output) - Typical | 50 Ω                         |
| Ftune +/- 10% Rejection             | < -12dB                      |
| Ftune +/- 15% Rejection             | < -18dB                      |
| Ftune +/- 20% Rejection             | < -22dB                      |
| Tuning Speed                        | < 35 μs                      |
| Insertion Loss (Typical)            | 3.9dB                        |
| Tuning Resolution*                  | 250KHz                       |
| P1dB                                | +24dBm                       |
| Max Power Handling                  | +28dBm                       |
| IIP3                                | +39dBm                       |
| DC Power - Typical<br>Max           | 3.3 Volts<br>30 mA           |
| Operating Temperature Range         | -40 to +85 °C                |
| Control Interface                   | Serial Input                 |
| Dimensions                          | 0.575 x 0.575 x 0.350 inches |

\*See page 3 for details

Note: Parameters subject to change

# Mechanical

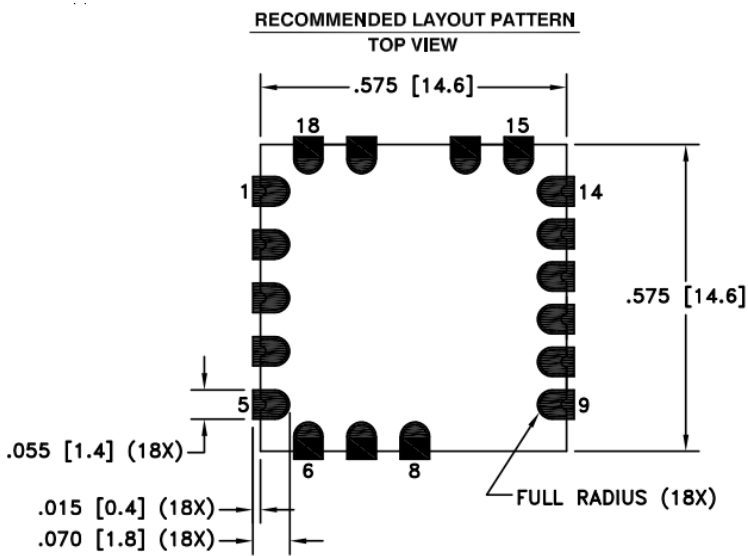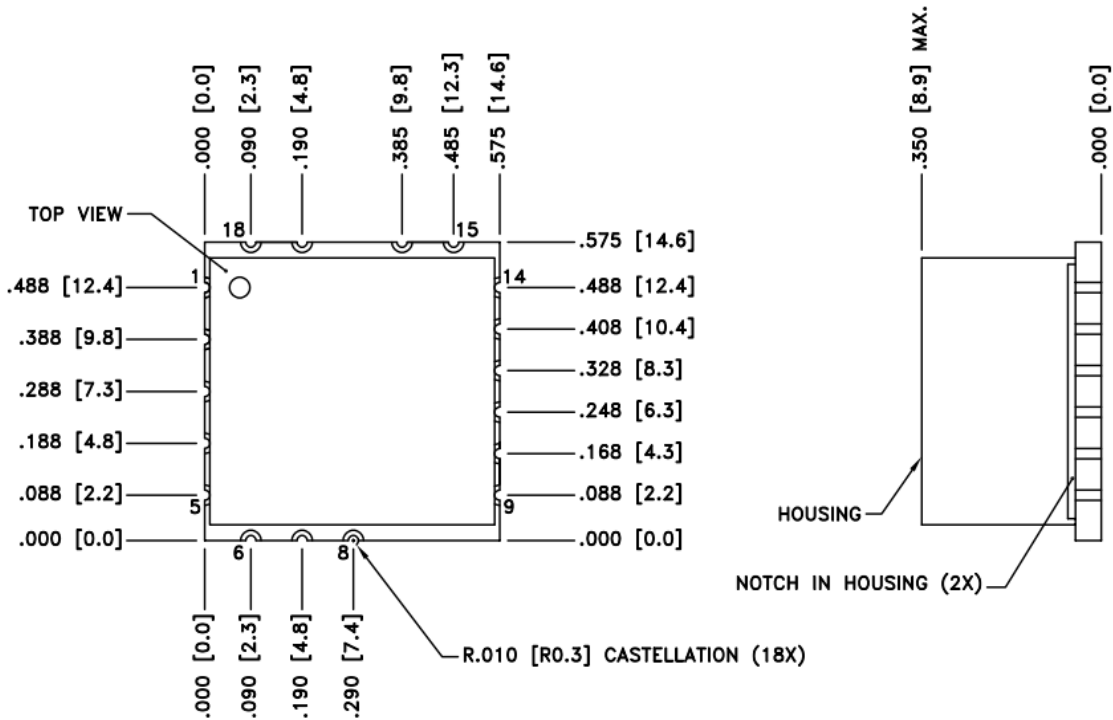

- NOTES:
1. TOLERANCES  $\pm 0.010$  [0.25] UNLESS OTHERWISE SPECIFIED.
  2. DIMENSIONS ARE INCHES [mm].

| PIN DESIGNATORS |             |
|-----------------|-------------|
| PIN NUMBER      | DESCRIPTION |
| 1               | RF_IN       |
| 2               | GND         |
| 3               | SPI_CLK     |
| 4               | SPI_MOSI    |
| 5               | NC          |
| 6               | NC          |
| 7               | NC          |
| 8               | NC          |
| 9               | NC          |
| 10              | NC          |
| 11              | NC          |
| 12              | TUNE_READY  |
| 13              | GND         |
| 14              | RF_OUT      |
| 15              | GND         |
| 16              | VCC (+3.3V) |
| 17              | SPI_CS      |
| 18              | GND         |

NC = NO CONNECT


# Serial Address Input Timing Diagram

Tuning resolution is 250KHz from address 720 decimal (90.000MHz) to 1023 decimal (127.750MHz) .  
 Tuning resolution is 500KHz from address 1024 decimal (128.000MHz) to 1800 decimal (225.000MHz) .  
 Tuning of the filter starts when the last data clock (16th) pulse of the address is sent to the unit while the CS (Chip select) is low.

The filter will move to the correct tune channel which allows the tuned address frequency to pass while meeting all of the tuning parameters. In some cases the filter tune channel may not move.

| Symbol | Parameter                                       | Min | Max | Units |
|--------|---|-----|-----|-------|
| tSS    | Setup time MOSI Data to SCLK*                   | 50  |     | ns    |
| tu     | Hold Time MOSI Data From SCLK                   |     | 0   | ns    |
| tCH    | Clock High Time                                 | 125 |     | ns    |
| tCP    | Clock Period                                    | 250 |     | ns    |
| tCS    | Chip Setup Time (CS falling edge to SCLK start) | 125 |     | ns    |
| tTR    | Tune_Ready indicator***                         |     | 35  | us    |
| tACC   | Access time from Last (16th) SCLK edge to Fo**  |     | 35  | us    |

## 56XX ADDRESS PROTOCOL

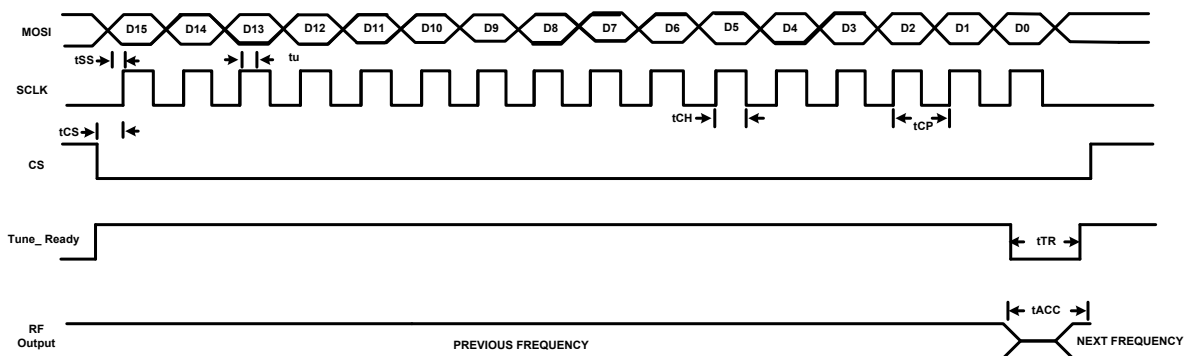

\* Data clocked in on SCLK leading edge.

\*\* Filter tunes to address on last clock bit of address SCLK.

\*\*\* Tune\_Ready at logic low when filter processing tuned address.

# Environmental Specification Standards

## Temperature:

- High temperature shall meet MIL-STD-810E, Method 501.3, Procedure I to 125°C storage, and procedure II to 85°C operating.
- Low temperature shall meet Method 502.3, Procedure I to -57°C storage, and Procedure II to -40°C operating.

## Vibration:

- MIL-STD-810E Method 514.4

## Shock:

- MIL-STD-810E Procedure VI, Method 516.4

## Solder Reflow:

- 245°C [max] for 30 seconds [max]



599 Wheeling Road  
Wheeling, IL 60090  
USA  
Phone 847.537.6300  
Fax 847.537.2700  
[www.netcominc.com](http://www.netcominc.com)